



# ST-35800


◆ 高速埋夹机 ◆

Feed-Off-The-Arm Reverse Lap Machine with integrated Puller


SCAN HERE TO SEE OPERATION VIDEO



扫描二维码观看操作视频



工艺：指缝缝制

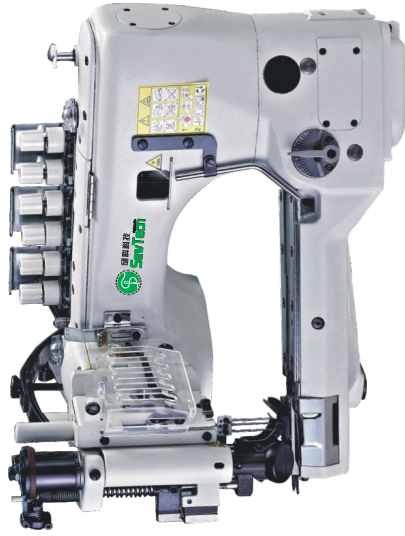

自动抬压脚，气动抬拖轮，  
内置电子拖布轮和下差动送料，轻松处理多层面料；  
上轴全自动供油，  
Pressure Foot Auto-lift, Automatic Puller lift;  
Automatic Belt Puller with differential feed, suitable for multi-layer materials;  
Automatic lubricating upper shaft.

## 技术参数(Tech & Parameters):

链式线迹/Double Chain stitch  
最高缝速Max Speed/ 4300RPM  
缝距Stitch Length/2.6-4.8mm  
机针和标准针距 Needle/2 or 3 needles, Standard needle gauge: 6.4mm  
马达电控 Motor and Control Box/Hoshing Full Function Control and Servo Motor

# ST-63922


◆ 辮脚机 ◆

Bottom Hemming Machine

SCAN HERE TO SEE OPERATION VIDEO



扫描二维码观看操作视频



工艺：辮脚卷边



自动抬压脚，气动抬拖轮，自动机针冷却，自动剪线装置，线头吸入式；  
内置电子拖布轮，轻松处理弹性面料；  
上轴全自动供油  
Pressure Foot Auto-lift, Automatic thread trimmer, standard and reverse folder, automatic fold hem margin;  
Upper + lower Belt Puller with needle feed, suitable also for elastic materials;  
Automatic dense stitch(for chain stitch type)  
Conversion kit to easily change from lock stitch to chain stitch, or vice versa.

## 技术参数(Tech & Parameters):

技术参数 (Tech & Parameters)  
线迹(Double Chain stitch)  
最高缝速Max Speed:4000RPM for chainstitch, 3500RPM for lock stitch  
缝距Stitch Length:2-8mm  
机针和标准针距 Needle:2 or 3 needles, Standard needle gauge: 6.4mm  
马达电控 Motor and Control Box:Hoshing Full Function Control and Servo Motor